
Specifications LCOR/RCOR-DV36IN



Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

LCOR/RCOR-DV36IN Left and Right Corner Direct Vent Gas Fireplace


MODEL	HEIGHT		FRONT WIDTH		BACK WIDTH		DEPTH		GLASS SIZE
	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	
LCOR-DV36IN RCOR-DV36IN	38" (965 mm)	38-1/8" (968 mm)	40-1/2" (1029 mm)	40" (1016 mm)	40-1/2" (1029 mm)	40" (1016 mm)	24-1/2" (622 mm)	24" (610 mm)	33" x 21-5/8" [838 x 549]

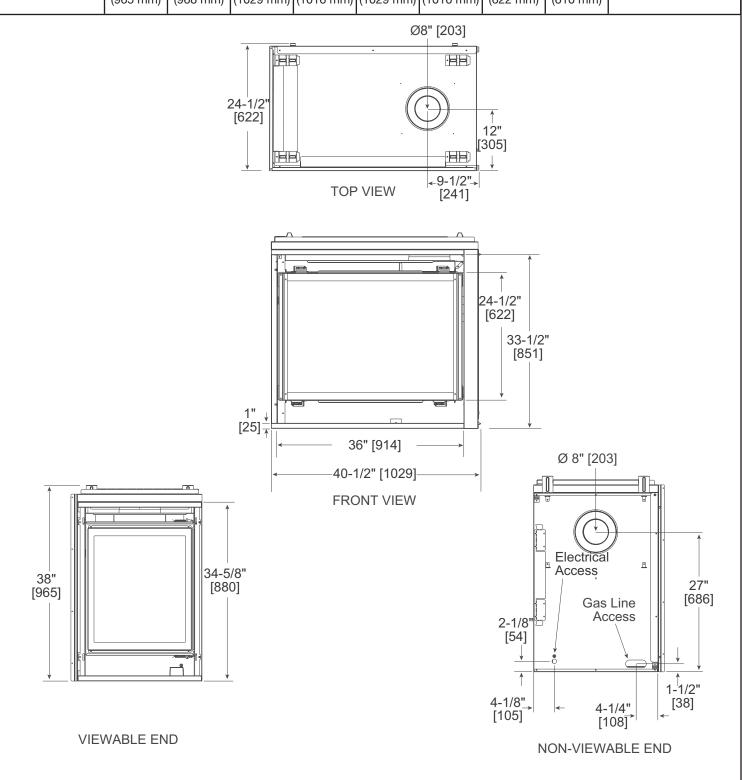


MINIMUM FIREPLACE CLEARANCES

AREA	TO COMBUSTIBLES (in inches)		
CLEARANCE TO CEILING	31		
COMBUSTIBLE/NON-COMBUSTIBLE FLOOR	0		
END OF APPLIANCE	0.5		
SIDES OF APPLIANCE	36		


FIREPLACE LOCATIONS

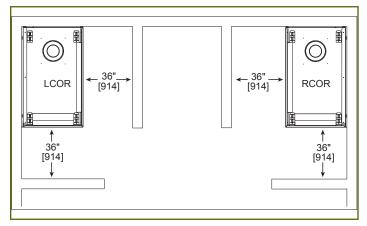


WALL PENETRATION

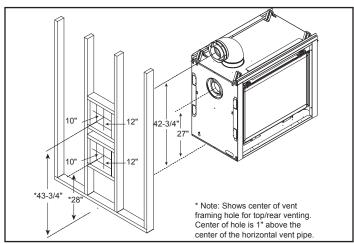


MANTEL LEG/WALL PROJECTIONS




FRAMING DIMENSIONS

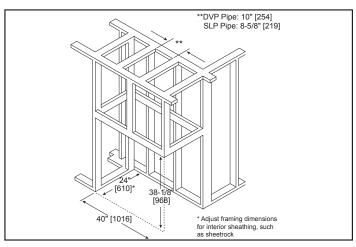

CLEARANCES TO COMBUSTIBLES



MANTEL PROJECTIONS



PRODUCT LISTING CODES				
US	ANSI Z21.88-2007			
CAN	CSA 2.33a-2007			
C UL US LISTED	UL307B			

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatilator.com



