**Specifications** 

MEZZO36ST




No one builds a better fire

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

MEZZO36ST 36" See-Through Direct Vent


Gas Fireplace

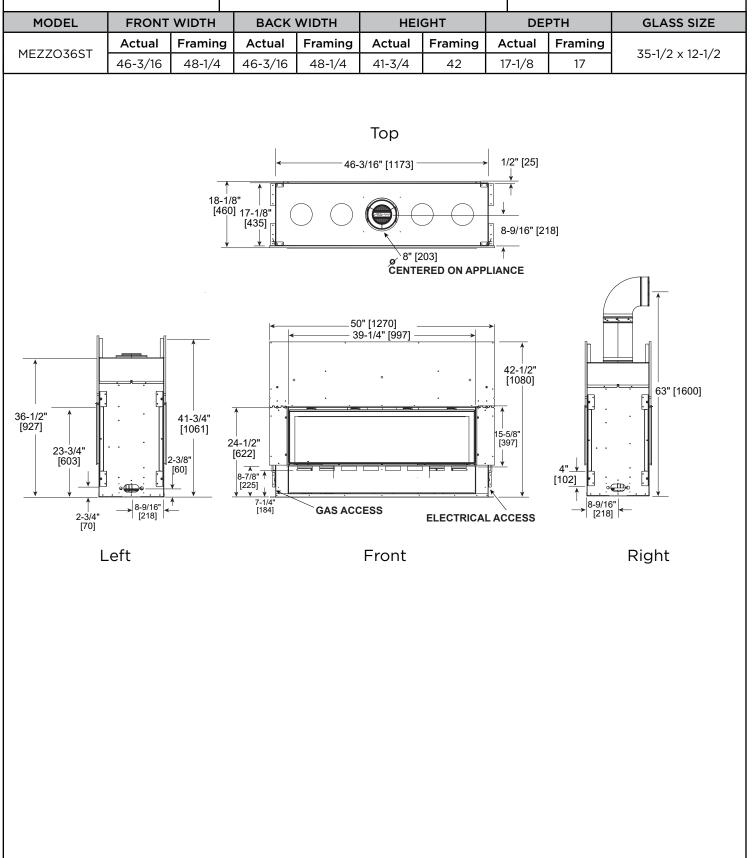

#### MEZZO36ST

### **Decorative Fronts Dimensions and Framing**

#### FRONT DIMENSIONS




Clean Face Trim

- Rectangular holes on bottom of access panel should be covered.
- Approved for 0"-4" finishing material on inside fit method
- If finishing materials are O-1" thick, the outer trim ring should be adjusted out so that the trim ring overlaps the finishing material. This is intended to provide the cleanest look.
- If finishing materials are 1-4" thick, install the trim ring all the way in. Finishing materials may not extend past the outside edge of the trim ring.


### FINISHED OPENING DIMENSIONS

HEATEGLO,




Loft Forge Front

- Rectangular holes on bottom of access panel <u>must be exposed</u>.
- ONLY approved for O"-1" finishing material on overlap fit method




Rectangular holes on bottom of access panel must be exposed.


 ONLY approved for O"-1" finishing material on overlap fit method

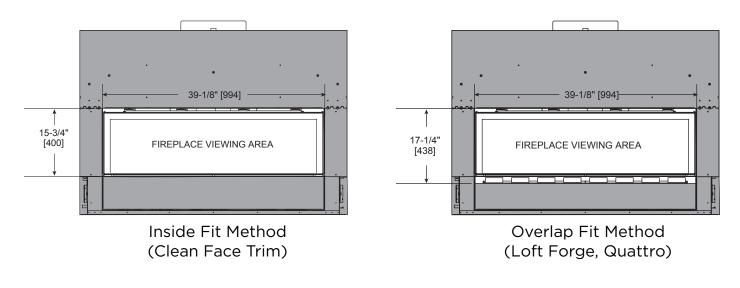


## APPLIANCE LOCATION




### WALL PENETRATION




### MANTEL PROJECTIONS - COMBUSTIBLE

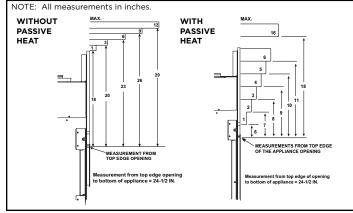


### MANTEL PROJECTIONS - NON-COMBUSTIBLE

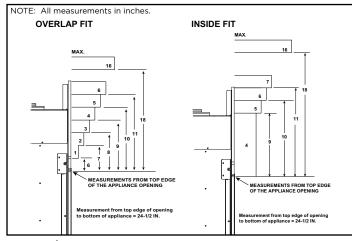


# FRAMING DIMENSION



## CLEARANCES TO COMBUSTIBLES



#### MANTEL LEG/WALL PROJECTIONS **COMBUSTIBLE OR NON-COMBUSTIBLE**



PRODUCT LISTING CODES	
US	ANSI Z21.88-2017
CAN	CSA 2.33-2017
	UL307B

not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatnglo.com



HEATEGLO No one builds a better fire

GM/HNG/MEZZO36ST 0420