Specifications

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

PHOENIX42-IFT


PHOENIX

TrueView Gas Fireplace

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		VIEWING AREA	
PHOENIX42-IFT	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	42" x 28-1/2" [1067 x 724]	
	50-3/8″ [1280]	51-3/8″ [1305]	34-5/8″ [879]	51-3/8″ [1305]	74-1/8″ [1883]	74-5/8″ [1895]	28-1/2" [724]	28" [711]		

HEAT


No one builds a better fire

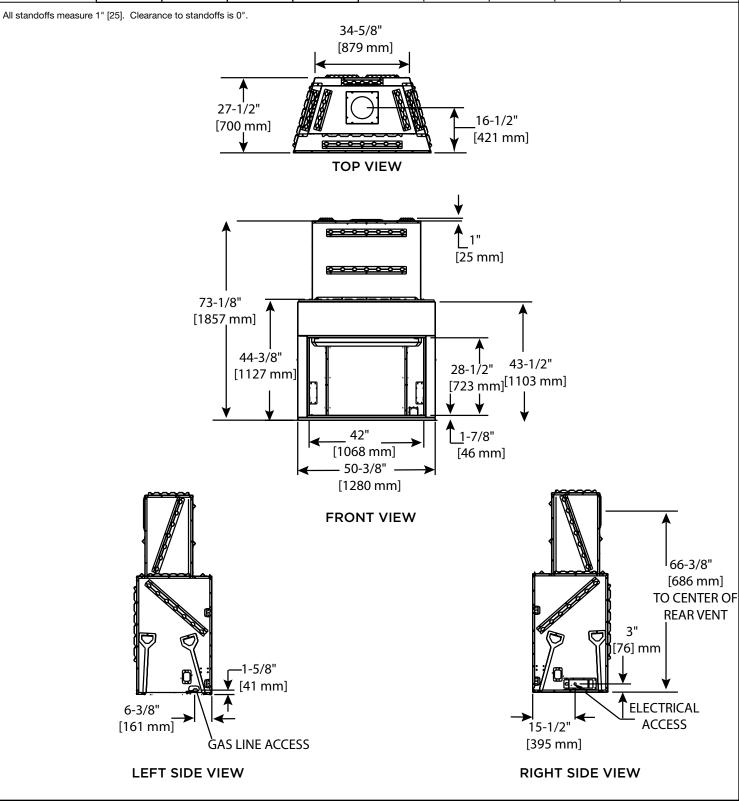


MINIMUM FIREPLACE CLEARANCES

AREA	TO COMBUSTIBLES
CLEARANCE TO CEILING	30" [762]
NON-COMBUSTIBLE FLOOR	0" [0]
COMBUSTIBLE FLOORING	0" [0]
BEHIND APPLIANCE	1" [25]
SIDES OF APPLIANCE	1" [25]
FRONT OF APPLIANCE	36" [914]

APPLIANCE LOCATION

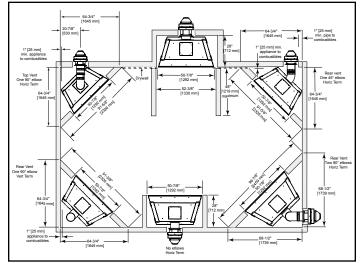

VENTING

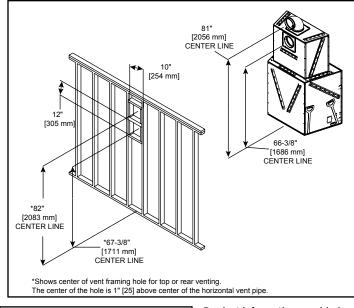


PRODUCT LISTING CODES				
US	ANSI Z21.50-2016			
CAN	CSA 2.22-2016			
CUL US LISTED	UL307B			

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.


Additional information can be found online at www.heatnglo.com

MINIMUM FRAMING DIMENSIONS



* Frame down to fireplace after unit is installed. ** If the inside of the framed cavity is to be finished, the framing dimensions must include the finished surface. If drywall is to be attached to the rear wall, the depth must be measured from the drywall surface. Add 9-1/4 inches to framing depth for an elbow vented off the rear of the appliance.

COMBUSTIBLE MANTEL CLEARANCES

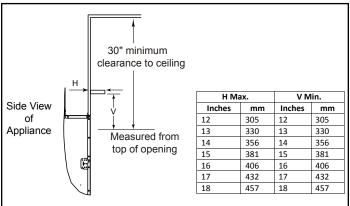

MANTEL LEG/WALL PROJECTIONS

