

ELECTRICAL CONNECTION REQUIREMENTS


CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz	Hardwire only	5,000

SF-SC55-BK


MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES
SIDES	0 "
FLOOR	0 "
ТОР	0 "
ВАСК	0 "
FRONT	36" [914]


MANTEL PROJECTIONS

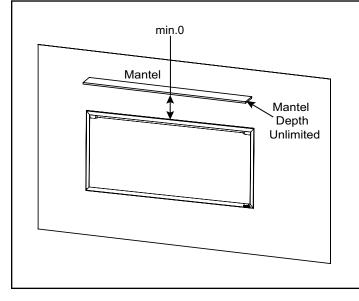

FINISHING DIMENSIONS



APPLIANCE LOCATION

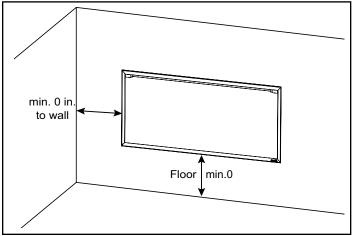

PRODUCT LISTING CODES		
US	CSA 22.2 No 46-M1988	
INTERNATIONAL	CSA 22.2 No 46-M1988	

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.



